

KX-TEM/KX-TES Series

Panasonic's analogue telephone system has taken telephone systems for small to mid-sized companies a giant leap forward, offering features seldom available in this category. Its easy upgradability reduces the cost of expansion, Caller ID increases your efficiency, and voice-processing integration improves productivity.

KX-TES824

Max. Trunks: 8
Max. Extensions: 24



KX-TEM824

Max. Trunks: 8
Max. Extensions: 24




Flexible and Simple Expansion

Panasonic offers you unprecedented flexibility and simple expansion with optional cards. By adding optional cards, you can expand the system from 3 COs/8 extensions to 8 COs/24 extensions to meet your changing needs. Neither additional programming nor costly rewiring is required.

3-level Automatic Reception with Voice Guidance

This enables calls to be handled efficiently. 3-level Automated Attendant (AA) service allows a caller to dial a single-digit number following the guidance of 3-level DISA* outgoing messages, and be directed to the appropriate section without having to go through an operator.

* DISA (Direct Inward System Access)

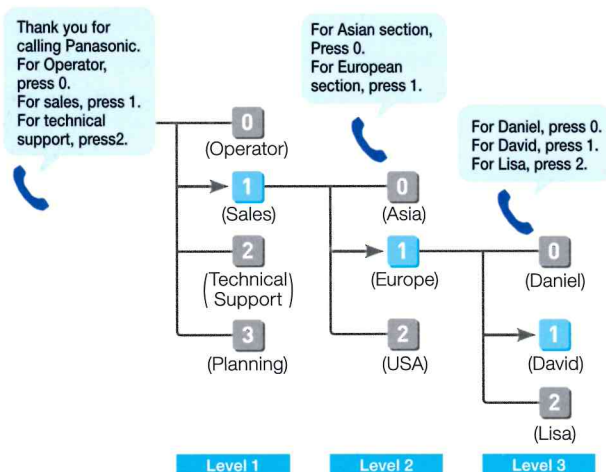

Built-in Voice Message (BV)

Customise your mailbox by recording your own greeting messages that are played when you can't answer your phone. Your callers can record their messages directly into your personal mailbox.

Call Centres and Workgroups can use the common message area for recording caller messages that can be played back later by an operator (manager).



Flexible SMS Routing

SMS (Short Message Service) messaging is an affordable and increasingly popular way to send text messages between fixed-line and mobile telephones. You can customise the system to allow SMS message senders to address their messages directly to a specific user's SLT, ensuring their messages are received quickly, and privately, by the desired user.

Analogue Telephone Systems

KX-TEM/KX-TES Series System Capacity

Maximum Trunks

Type	KX-TES824	KX-TEM824
Total No. of Trunks	8 ch	8 ch
Digital/Analogue Trunks		
Analogue	8 lines	8 lines
BRI	-	-
PRI23/30	- / -	- / -
T1/E1	- / -	- / -

Caller ID Display on SLT and APT

The system is compatible with Caller ID, which allows you to see the caller's information on SLTs and APTs. Proprietary display telephones can be used to access the Caller ID log for the 20 most recent calls (Call Log). And the system has 300 common logs. The logged incoming calls can be called back easily.

Maximum Terminal Equipment

Type	KX-TES824	KX-TEM824
Total No. of Extensions	24	24
Digital/Analogue Extensions		
SLT	24	24
APT	16	16
DPT	-	-

